



Easi-Serv Products
#211-12899 76th Ave.
Surrey B.C., Canada V3W 1E6


Phone (604) 590-0106
Fax (604) 590-1334
Internet www.easi-serv.com
Email service@easi-serv.com

Installation instructions for Easi-View Security Windows


- 1: Remove the five machine screws which hold the two halves of the window together.
- 2: Cut an 8 3/4" wide X 6 3/4" high hole in the door. The bottom of the hole should be approximately 58" from the bottom of the door.
- 3: Remove the paper from the glazing tape on the exterior portion of the window, and using care to align the window in a level position, press it onto the door. The tape will hold the exterior portion in position while you replace the five machine screws through the interior portion of the window into their receptacles.
- 4: Tighten the screws firmly, and using a utility knife, remove any glazing tape that has squeezed out. The tape will insure waterproofing.



Disassembled window ready for tape backing removal and installation to door

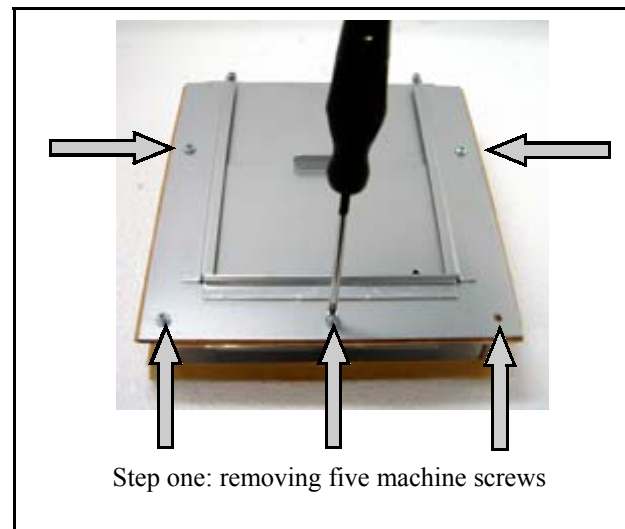

Step one: removing five machine screws

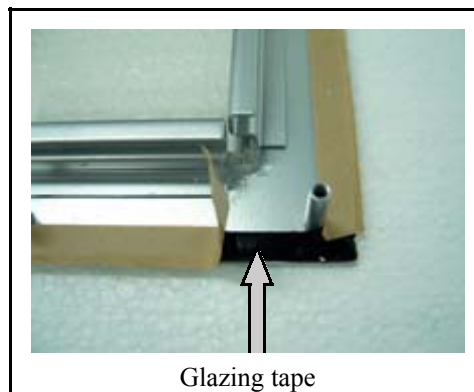

Glazing tape