




IL Series In-Line Vertical Lift Drive Thru Window

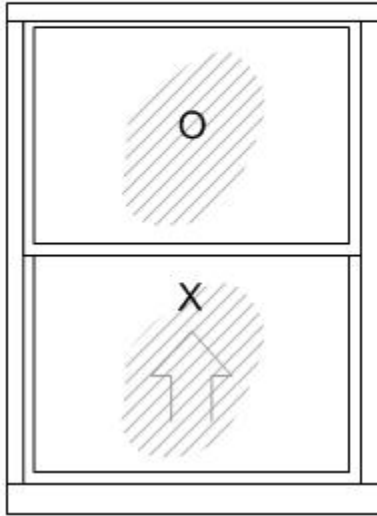

Exterior Elevation

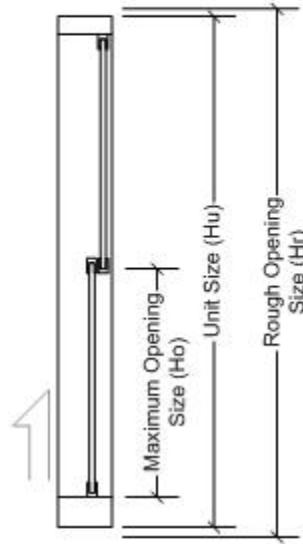

Section View

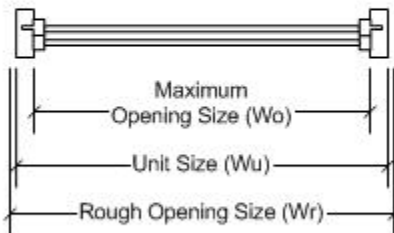

Plan View

Window Specifications

Model	Max Opening Size		Unit Size	
	Wo	Ho	Wu	Hu
IL 100 Automatic	18 3/4" (476mm)	20 3/4" (527mm)	24 " (610mm)	48" (1219mm)
IL 200 Manual	20 1/2" (521mm)	21 3/4" (552mm)	24 " (610mm)	48" (1219mm)

Rough Openings:

For installation in storefront framing add 1/4" to Unit Size

For installation in rough wood or other material add 1/2" to Unit Size

Specifications

Moving Panel Construction

All moving panels are counterbalanced and are guided with UHMW blocks.

Weatherproofing

IL windows have minimal weather-stripping and are generally best suited for interior applications or areas where the window will be sheltered from driving rain or wind.

Opening Modes

- Automatic windows are electro-mechanically driven with no-touch operation. Automatic opening is controlled by optical sensors and a three-position logic lock that provides for normal operation (automatic opening), peak period (locked open), and night usage (locked shut).
- Manual windows are easy to operate and are carefully balanced to allow one-finger opening.

Security Features

Manual windows are fitted with a plunger lock. Automatic windows are locked using the logic lock and a solenoid lock that automatically locks the window in the closed position.

Glazing

The moving panel and fixed panel are glazed with 6mm tempered glass.

Warranty

All windows are provided with a 12 month limited warranty for parts and labour.

Ready to Install

All windows are shipped pre-assembled, fully glazed and ready to install.

Standard Options (No Extra Cost)

Clear anodized aluminum or bronze (Kawneer #40) anodized aluminum finish

Custom Options (Extra Cost)

Custom colour finishes in either powder coat or wet coat paint application.
Custom sizes available to satisfy any requirements.

