




SUI Series In-Line Vertical Lift Drive Thru Window

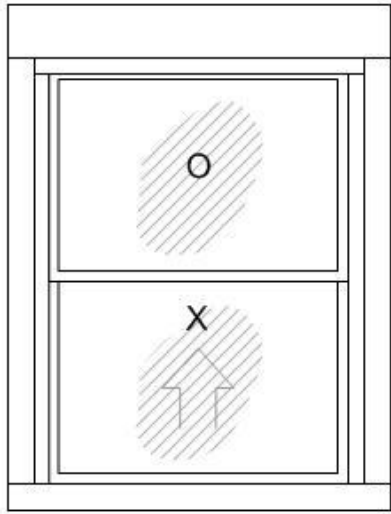

Exterior Elevation

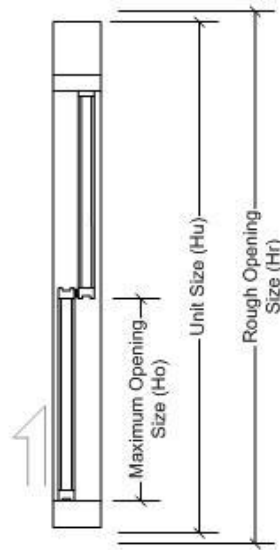

Section View

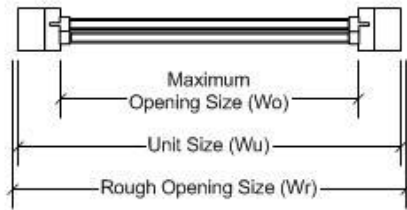

Plan View

Window Specifications

Model	Max Opening Size		Unit Size	
	Wo	Ho	Wu	Hu
SUI 100 Automatic	18 3/4" (476mm)	20 3/4" (527mm)	24 " (610mm)	48" (1219mm)
SUI 100 Automatic Custom Size			Custom	Custom
SUI 200 Manual	20 1/2" (521mm)	21 3/4" (552mm)	24 " (610mm)	48" (1219mm)
SUI 200 Manual Custom Size			Custom	Custom

Rough Openings:

For installation in storefront framing add 1/4" to Unit Size

For installation in rough wood or other material add 1/2" to Unit Size

Specifications

Moving Panel Construction

All moving panels are counterbalanced and are guided with UHMW blocks.

Weatherproofing

Windows are guaranteed weatherproof and are built with double mohair seals and interlocking jambs on all panel moving edges.

Opening Modes

- Automatic windows are electro-mechanically driven. Automatic opening is controlled by a choice of push buttons or a three-position logic lock that provides for normal operation (automatic opening), peak period (locked open), and night usage (locked shut). No touch opening using optical sensors is available in certain circumstances as an option.
- Manual windows are easy to operate and are carefully balanced to allow one-finger opening.

Security Features

Manual windows are fitted with a plunger lock. Automatic windows are locked using the logic lock and a solenoid lock that automatically locks the window in the closed position.

Glazing

All windows are glazed with 1 inch sealed units, fitted with 3mm tempered glass panes on both sides.

Warranty

All windows are provided with a 12 month limited warranty for parts and labour.

Ready to Install

All windows are shipped pre-assembled, fully glazed and ready to install.

Standard Options (No Extra Cost)

Clear anodized aluminum or bronze (Kawneer #40) anodized aluminum finish

Custom Options (Extra Cost)

Custom colour finishes in either powder coat or wet coat paint application.
Custom sizes available to satisfy any requirements.