

# Drive-Thru Windows

Easi-Serv Products has been developing and manufacturing drive-thru windows for over twenty-five years. Our windows are known for their clean design, strength, dependability, precise machine work, careful construction and ease of fitting. Designed to withstand the rigours of northern winters or the heat of summer, Easi-Serv windows offer superior weatherproofing and guaranteed weather protection. With a variety of window styles and sizes, Easi-Serv Products drive-thru windows are your most cost effective and logical choice.



## SS Series In-Line Single Side Slide

- Sloped thermally broken stainless steel sill and a ½" moving panel guide track that doubles as a rain block.
- Optional backlit greeting panel built into the sill that can be fitted with interchangeable message boards
- ETL listed product
- Large range of standard sizes, custom sizes available



## CSP Series Bump-Out Single Side Slide

- Classic style bump out window
- Drop down stainless steel sill
- Insulated inclined head section with an integral rain drip
- Optional fan driven heater installed in the hood.
- Large interior counter space
- ETL listed product



## SB Series In-Line Bi-Parting Side Slide

- Sloped thermally broken sill and a ½" moving panel guide track that doubles as a rain block
- Optional backlit greeting panel built into the sill that can be fitted with interchangeable message boards



## SUI Series In-Line Vertical Lift

- Flush mounting vertical lift window
- Heavy duty frame construction for exterior use
- Single glazed with ¼" tempered or laminated glass
- Custom sizes available



## IL Series In-Line Vertical Lift

- Flush mounting vertical lift window
- Single glazed with ¼" tempered or laminated glass
- Suitable for interior use
- Custom sizes available

## Window Construction

Windows are constructed from proprietary designed anodized aluminum extrusions, quality moving parts and tempered glass that combines to create a quality weatherproof product that will last for many years. All extrusions are designed as narrow as possible to maximize glass area and sightlines.

### ETL Listings

Where noted windows have been certified by ITS ETL SEMKO. This certification mark indicates that the window has been tested to and has met the minimum requirements of a widely recognized (consensus) U.S and Canadian product safety standard, that the manufacturing site has been audited, and that Easi-Serv has agreed to a program of periodic factory follow-up inspections to verify continued conformance.

### Moving Panel Construction

Side Slide: Moving panels are top hung with sealed bearings running on a UHMW guide track.

Vertical Lift: Moving panels are counterbalanced and are guided with UHMW blocks.

### Weatherproofing

Windows are guaranteed weatherproof and are built with double mohair seals and/or foam seals and interlocking jambs on all panel moving edges. In-Line windows feature a sloped thermally broken sill and a ½" moving panel guide track that doubles as a rain block.

### Opening Modes

- Automatic windows are electro-mechanically driven with no-touch operation. Automatic opening is controlled by optical sensors and a three-position logic lock that provides for normal operation (automatic opening), peak period (locked open), and night usage (locked shut).
- Manual windows are easy to operate and are carefully balanced to allow one-finger opening. In-Line windows feature a large, easy to grab, handle.
- Self Closing windows have all the same features as manual windows as well as a counterbalanced self closing mechanism which closes the window automatically as soon as the operator lets go of the grab handle.


### Security Features

In-line: Manual windows are fitted with Adams-Rite self-closing thumb latches. Automatic windows are locked using the logic lock and can also be fitted with an optional security override that limits window opening to 8 5/8". All side slide windows feature a drop down security bar, which prevents unauthorized window opening from the exterior.

Vertical Lift: Manual windows are fitted with a plunger lock. Automatic windows are locked using the logic lock and a solenoid lock that automatically locks the window in the closed position.

### Warranty

All windows are provided with a 12 month limited warranty for parts and labour.

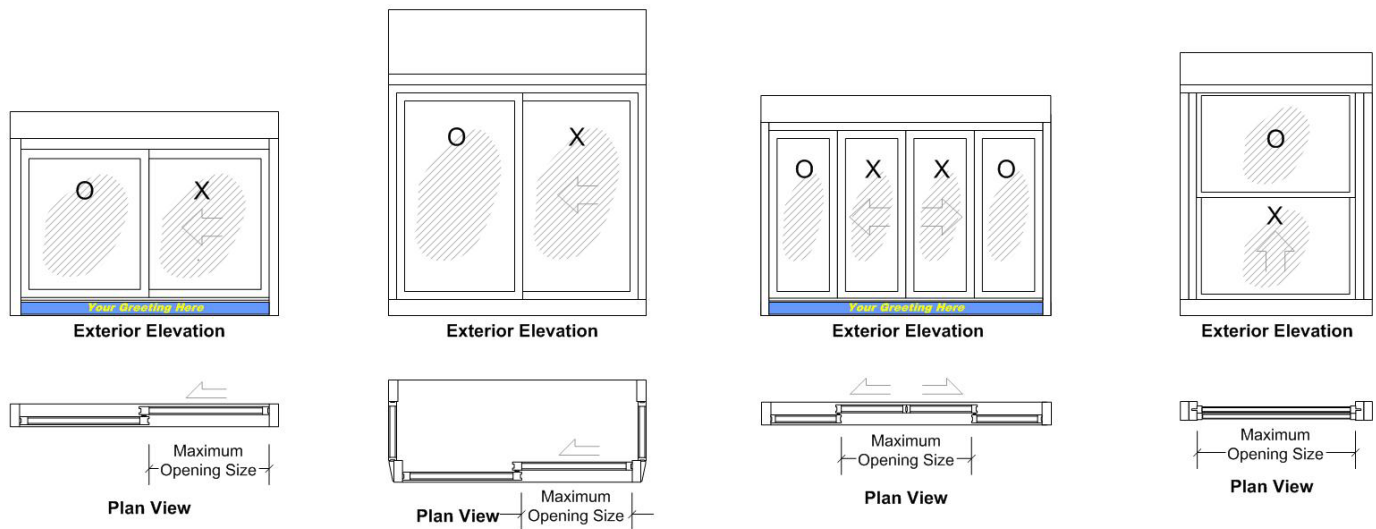

**SS Series**  
In-Line Side Slider

**CSP Series**  
Bump-Out Side Slider

**SB Series**  
In-Line Bi-Part Side Slider

**SUI / IL Series**  
In-Line Vertical Lift

## Standard Window Specifications

Model	Opening Mechanism	Listing	Opening	Max Opening Size		Unit Size			Glazing	Options
				Wo	Ho	Wu	Hu	Du		
SS 100-1	Automatic		OX or XO	20 7/8"	27 3/8"	50"	38"	4 1/2"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	Illuminated Greeting Panel Security Override Limit
SS 200-1	Manual		OX or XO	20 7/8"	27 3/8"	50"	38"	4 1/2"		
SS 300-1	Self Closing		OX or XO	20 7/8"	27 3/8"	50"	38"	4 1/2"		
SS 100-2	Automatic		OX or XO	19 3/8"	33 1/8"	47 1/2"	43 1/2"	4 1/2"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	Illuminated Greeting Panel Security Override Limit
SS 200-2	Manual		OX or XO	19 3/8"	33 1/8"	47 1/2"	43 1/2"	4 1/2"		
SS 300-2	Self Closing		OX or XO	19 3/8"	33 1/8"	47 1/2"	43 1/2"	4 1/2"		
SS 100-3	Automatic		OX or XO	19 3/8"	25 3/8"	47 1/2"	36"	4 1/2"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	Illuminated Greeting Panel Security Override Limit
SS 200-3	Manual		OX or XO	19 3/8"	25 3/8"	47 1/2"	36"	4 1/2"		
SS 300-3	Self Closing		OX or XO	19 3/8"	25 3/8"	47 1/2"	36"	4 1/2"		
SS 100-4	Automatic		OX or XO	15 3/8"	27 7/8"	39"	38"	4 1/2"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	Illuminated Greeting Panel Security Override Limit California Health Code Compliant
SS 200-4	Manual		OX or XO	15 3/8"	27 7/8"	39"	38"	4 1/2"		
SS 300-4	Self Closing		OX or XO	15 3/8"	27 7/8"	39"	38"	4 1/2"		
SS 100-5	Automatic		OX or XO	15 3/8"	34 3/8"	39"	45"	4 1/2"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	Illuminated Greeting Panel Security Override Limit
SS 200-5	Manual		OX or XO	15 3/8"	34 3/8"	39"	45"	4 1/2"		
SS 300-5	Self Closing		OX or XO	15 3/8"	34 3/8"	39"	45"	4 1/2"		
SS 200-6	Manual		OX or XO	13 7/8"	12 7/8"	36"	20"	4 1/2"	1" Insulated Glass	Illuminated Greeting Panel
CSP 100	Automatic		OX or XO	18"	36 1/8"	47 3/8"	56 1/2"	19"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	
CSP 200	Manual		OX or XO	18"	36 1/8"	47 3/8"	56 1/2"	19"		
SB 100	Automatic		OX-XO	20 1/4"	27 1/4"	53 1/2"	37 1/2"	4 1/2"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	Illuminated Greeting Panel Security Override Limit
SB 200	Manual		OX-XO	20 1/4"	27 1/4"	53 1/2"	37 1/2"	4 1/2"		
IL 100	Automatic		N/A	18 3/4"	20 3/4"	24 "	48"	4 1/2"	1/4" Tempered Glass or 1/4" Laminated Glass	Custom Sizes made to order
IL 200	Manual		N/A	20 1/2"	21 3/4"	24 "	48"	4 1/2"		
SUI 100	Automatic		N/A	18 3/4"	20 3/4"	24 "	48"	4 1/2"	1" Insulated Glass or 1/4" Tempered Glass or 1/4" Laminated Glass	Custom Sizes made to order
SUI 200	Manual		N/A	20 1/2"	21 3/4"	24 "	48"	4 1/2"		

### Rough Openings:

For installation in storefront framing add 1/4" to Unit Size; For installation in rough wood or other material add 1/2" to Unit Size

### Ready to Install

All windows are shipped pre-assembled, fully glazed and ready to install.